

User's manual

Universal Kayak Holder 62948



Illustration similar, may vary depending on model

Please read and follow the operating instructions and safety information prior to initial operation.

Technical changes reserved!

Illustrations, functional steps, and technical data may deviate insignificantly due to continuous further developments.



The information contained in this document may alter at any time without prior notice. No part of this document may be copied or otherwise duplicated without prior written consent. All rights reserved.

WilTec Wildanger Technik GmbH cannot be held liable for any possible mistakes in this operating manual, nor in the diagrams and illustrations shown.

Although WilTec Wildanger Technik GmbH has made every possible effort to ensure that this operating manual is complete, accurate, and up-to-date, errors cannot be ruled out entirely.

If you have found an error or wish to suggest an improvement, we look forward to hearing from you.

Send us an e-mail to:

service@wiltec.info

or use our contact form:

<https://www.wiltec.de/contacts/>

The most recent version of this manual in several languages can be found in our online shop:

<https://www.wiltec.de/docsearch>

Our postal address is:

WilTec Wildanger Technik GmbH
Königsbenden 12
52249 Eschweiler Germany

To return your goods for exchange, repair, or other purposes, please use the following address. Attention! To allow for a trouble-free complaint or return, it is important to contact our customer service team before returning your goods.

Retourenabteilung
WilTec Wildanger Technik GmbH
Königsbenden 28
52249 Eschweiler Germany

E-mail: **service@wiltec.info**

Tel: +49 2403 55592-0

Fax: +49 2403 5559 -15



Introduction

Thank you for choosing to purchase this quality product. To minimise the risk of injury, we ask you to always take some basic safety precautions when using this product. Please read this operating manual carefully and make sure that you understand it.
Keep these operation instructions in a safe place.

Safety instructions

- Do not allow children to play with or near the support.
- Any incorrect mounting and/or use of the support may lead to serious injuries or death.
- Do not exceed the maximum charge capacity of 80 kg.
- When mounting the support to a concrete wall, you must check first that the wall has enough stability to do so. Any wall not having sufficient stability can lead the screws to tear off and the kayak to fall.
- Any incorrect mounting can lead to damages or injuries.
- The steel cable cannot prevent your kayak from getting stolen.

Scope of delivery

Name	Qty.
Stainless-steel support	2
Hexagon tension screw (M6×50)	10
Plastic anchor	10
Steel cable	1

Tools needed for mounting (not included)

- Lock
- Measuring tape
- Screwdriver
- Electric drill machine
- 5 mm ($\frac{3}{16}$ ") drill
- Percussion drill, 8 mm ($\frac{5}{16}$ ") drill (for concrete walls)

Notes!


- If the support is mounted on thick drywall or wall plaster, it might be necessary to buy longer screws.
- If the support is mounted on drywall, it is not sufficient to screw in the screws manually.

Assembly

1. With a measuring tape, determine the height and distance of the supports as well as the distance between the screws.
2. The supports are mounted at a distance of 35 % and 45 % of the length of your kayak.
3. Do not mount the supports on a height that you cannot reach. Make sure that both supports are at the same height.
4. With an electric drill machine, drill pilot holes for the screws with a 5 mm ($\frac{3}{16}$ ") drill.
Note! Drill pilot holes for the plastic anchors with a percussion drill and an 8 mm ($\frac{5}{16}$ ") drill when mounting the device to a concrete wall.
5. Insert the screws into the pilot holes through the holes of the support. Tighten the screws with a screwdriver. Do not tighten the upper screw entirely, first insert the lower screw. Then tighten both screws.

Use

1. Lift your kayak into the support.
2. Guide the steel cable through the kayak. Place the cable so that either end reaches the locking holes.
3. Lock either end of the cable and the locking holes with each other.

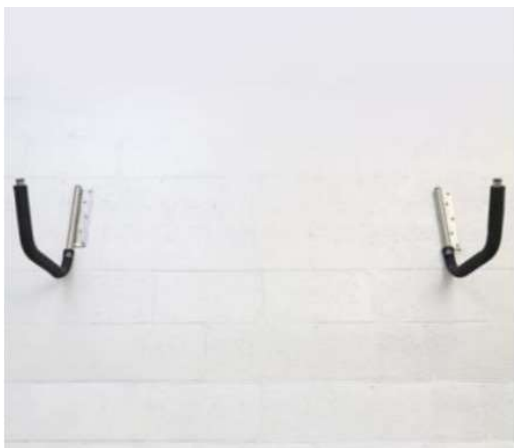

Important note:

Reproduction and any commercial use (of parts) of this operating manual, requires a written permission of WilTec Wildanger Technik GmbH.