
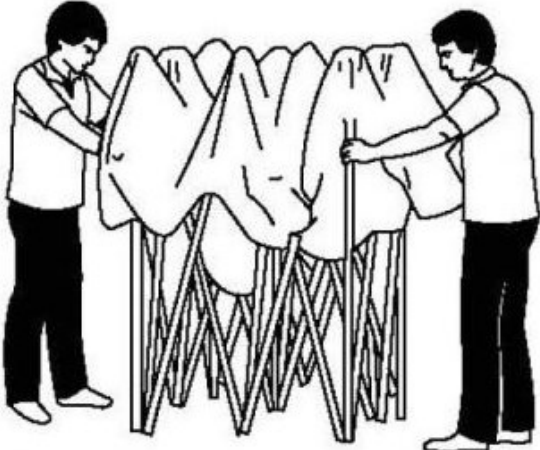
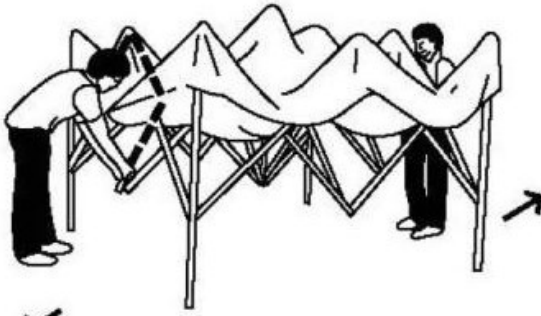
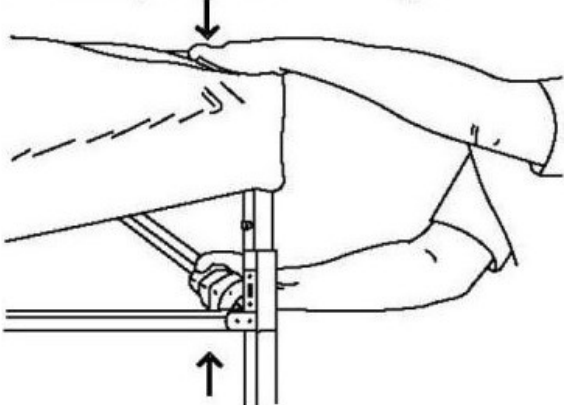


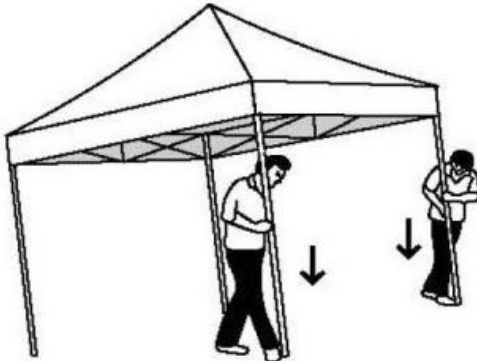

64825, 64826 – Watertight Folding Tent 3×3 m

Assembly


 <p>Step 1 – Place the folding tent in the centre of the area that you would like to roof. Take off the cover. Continue with 1 person at either end. Take two outer poles each, slightly lift the tent, and step back until the arms are outstretched.</p>	 <p>Step 2 – Take the lower end of the diamond shown on both sides. Slightly lift, then step back until the tent is completely open. Caution: Keep an eye on your fingers! Danger of pinching!</p>
 <p>Step 3 – Slide upwards the sliding lock on each corner until the locking pins engage into the locking notches. Use the other hand to hold the pole on the upper side.</p>	 <p>Step 4 – Lift two poles each next to each other and slide out the inner poles until the lock engages. The height of the poles can be adjusted to different heights with the help of the locking holes.</p>

Important!


- Under windy conditions: Secure the tent with the help of the tent pegs and ropes included.
- Under strong wind: Unmount the tent.
- Under rainy conditions: Do not leave the tent unattended.
- When the cloth of the tent is wet: Before storing away, wait for the cloth to have dried completely.
- Cleaning: Clean with a mild detergent and water.
- Storage: Disassemble the tent and store it inside the bag.




Disassembly

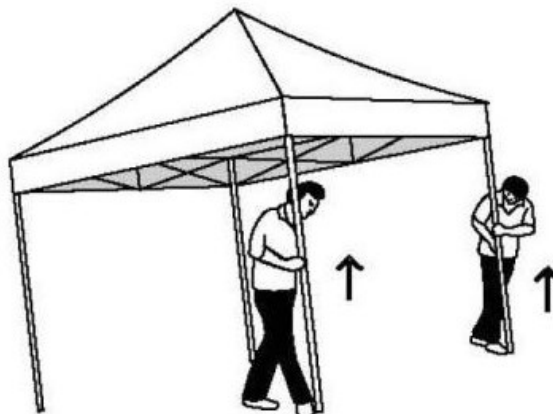

Step 1 – Slightly lift the two poles, press the locking pin in, slide up the inner poles into the outer poles.

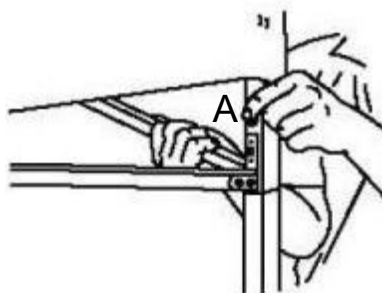

Step 2 – Loosen the sliding locks at the corners by pressing in the locking pins (A).

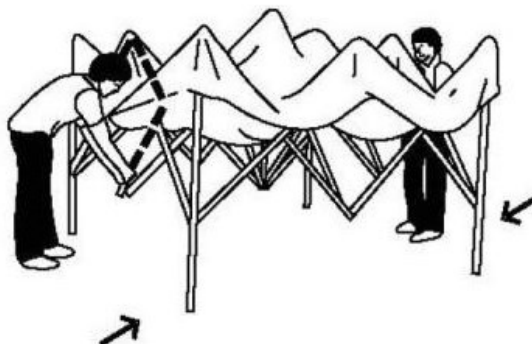

Step 3 – Take the lower end of the diamond shown on two opposite sides, slightly move the tent by stepping towards the other person until the tent is $\frac{3}{4}$ closed. Take two outer poles and slide them shut while having an eye on your fingers. Danger of pinching! Keep the tent in its bag.

Important note:

Reproduction and any commercial use (of parts) of this operating manual, requires a written permission of WilTec Wildanger Technik GmbH.